


P/N: PNS24-SC5E

Bold port numbering enables quick and ready identification of outlets .

PATCH PANEL, CAT5E, FTP, 19inch, T568A/B, 24ports, 1U, IDC type.

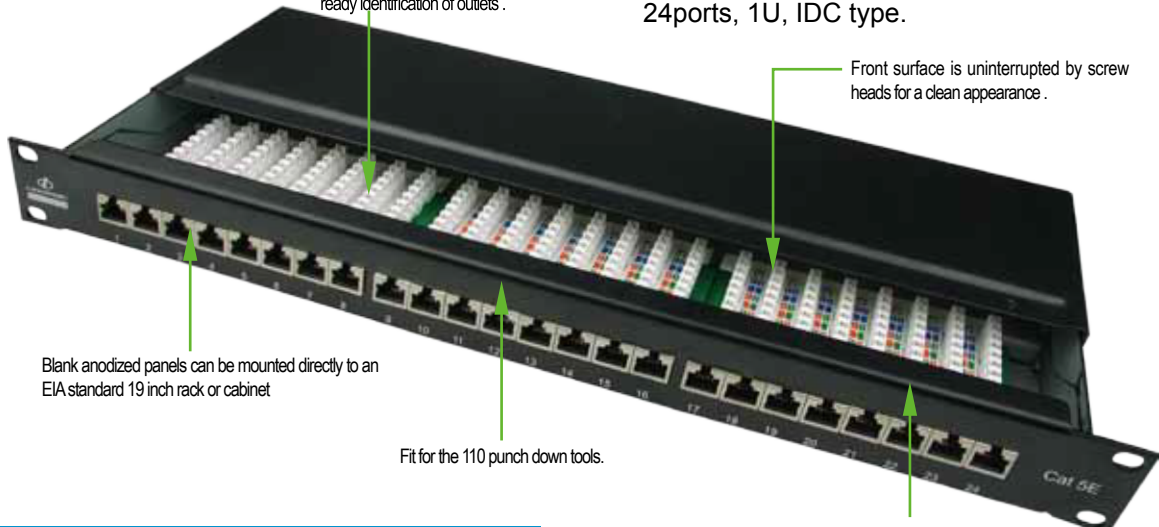






Blank anodized panels can be mounted directly to an EIA standard 19 inch rack or cabinet

Fit for the 110 punch down tools.

Front surface is uninterrupted by screw heads for a clean appearance .

Feature universal wiring for both T 568A and T 568B and voice application .

PRODUCT FIGURE

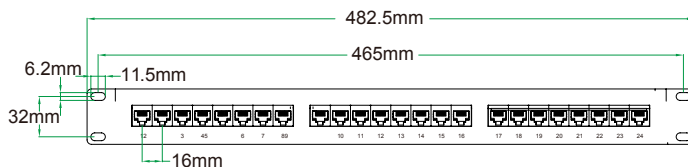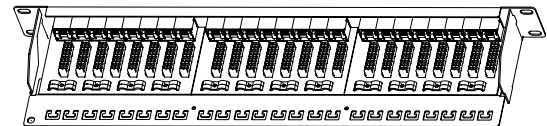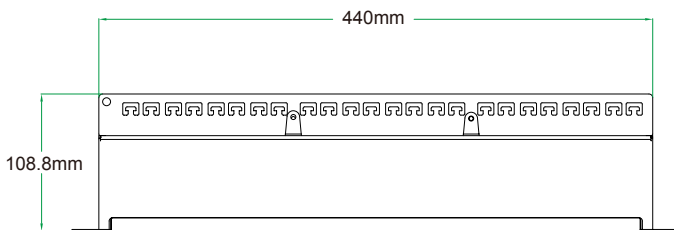

DESCRIPTION

The shielded patch panels are loaded with shielded keystone jacks , which are housed in a closure full shielding metal enclosure designed to meet highest industry requirement.A shielded version is also available to maximum protection from EMI/RFI interference. By utilizing fully shielded jacks and connecting hardware, you can reduce the effects of interference on the network data transmissions.

FEATURES AND BENEFITS

- Design to mount to any standard 19" rack or cabinet
- 24 -port Cat 5E shielded Patch panel
- Space saving, high-density 1U
- Black Electrostatic Powder-Coated Steel: phosphor bronze with tin plating over nickel . Meet or exceed the requirement of ANSI /TIA/EIA 568B.2
- Use keystone jacks and keystone inserts to configure your panel to accommodate a variety of schemes
- Sturdy Aluminum Plate around RJ 45 Jacks
- Phosphor bronze with 6-50 micro inches gold plated
- Available with T568 A. T568 B wiring pattern and meeting the requirement of Cat 5E standard
- Color Coded TIA/EIA 568A (international) and 568B (AT&T Standard) Wiring For Easy Installation
- Termination accepts 22,24 26 AWG (0.64 ,0.5 and 0.4)solid wires
- Metal sheet: Corrosion resistant steel
- Plastic: fire self -extinguish high impact plastic

CAT 5E FTP 24-PORT PATCH PANEL

P/N: PNS24-SC5E

INSTALLMENT INSTRUCTIONS



Insert each wire into the appropriate channel.




Terminate wires using Linkbasic tool (P/N: TLA01) or equivalent.



Check and ensure each wire in correct slot.



Insert the jack into the correct mounting location properly.

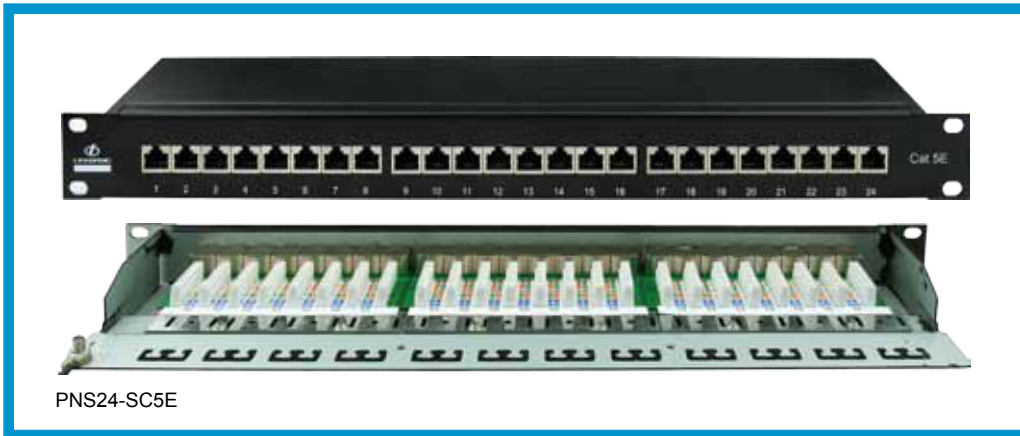

PNS24-SC5E

Cat 5E FTP 24-port patch panel

ORDER INFORMATION

Part number	Description	standard color	Inner box	Carton	Carton measurement	Carton weight
PNS24-SC5E	24-port Cat5e shielded patch panels (IDC style)	Black	1PC	5PCS	L 53.5cm× W 31.3cm × H 23.4cm	10.00KG